


PRODUCT PROFILE # 559C

MicroPoint Cable Model TFR-MC115 Characteristics

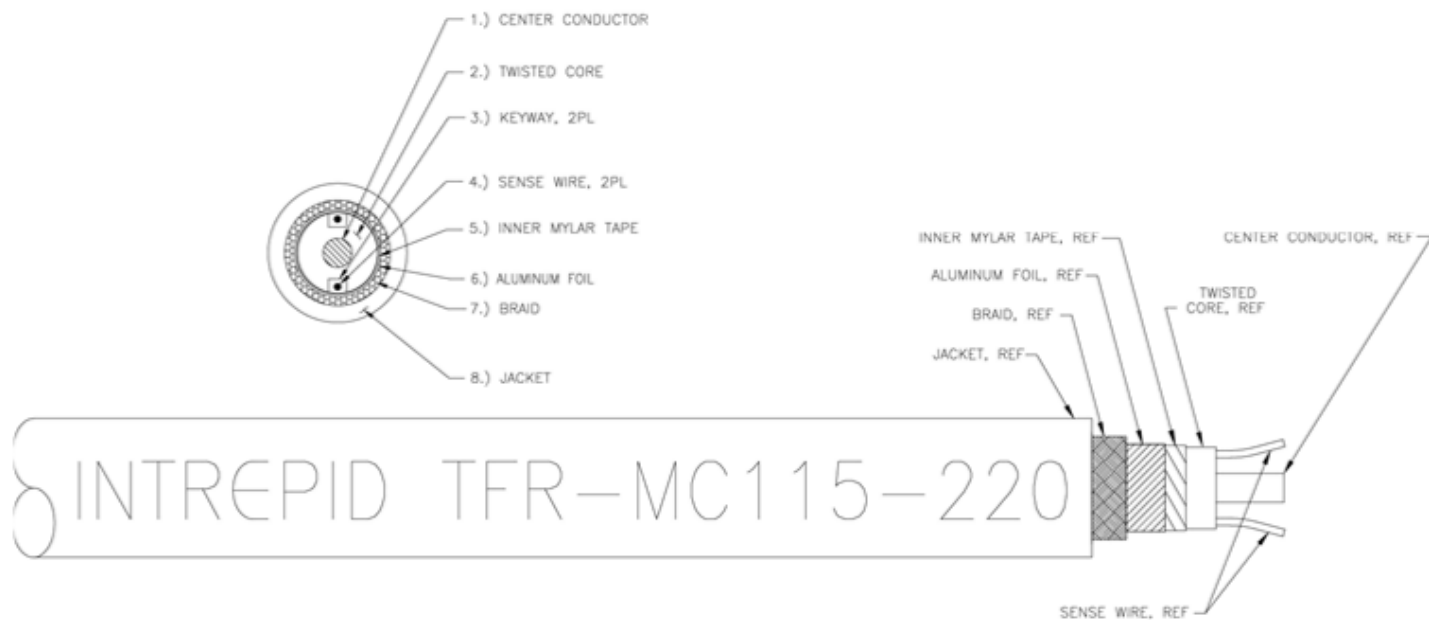

PHYSICAL CHARACTERISTICS:

JACKET ----- BLACK, FLAME RETARDANT CROSS LINKED LOW DENSITY POLYETHYLENE (FR XL LDPE), 0.1930D.
 BRAID ----- STRAND-----TINNED COPPER, 36AWG
 COVERAGE -----95.2%
 AL FOIL ----- FOIL-MYLAR-FOIL CONSTRUCTION
 MYLAR TAPE --- HELICALLY WRAPPED
 SENSE WIRES -- STRANDED, TINNED COPPER, 30 GAUGE EQUALAVENT
 CORE ----- FLAME RETARDANT POLYOLEFIN (FR HDPE)
 CENTER
 CONDUCTOR -- TINNED SOLID CONDUCTOR, 18AWG, 0.040 DIA.

SPECIFICATIONS:

TEMPERATURE
 RANGE ----- -40°C TO +70°C
 MINIMUM BENDING
 RADIUS ----- 5 INCHES
 WEIGHT----- WEIGHT PER FOOT 0.039 POUNDS, (0.017KG)
 IEC # ----- IEC60332-3-24

PACKAGING:

PACKAGING OPTION	LENGTH -0% +2%		WEIGHT (APPROXIMATE)	
	METER	FEET	KILOGRAMS	POUNDS
220 METER	220	721' 9"	12.7	28

Ordering Information:

Order Model MC115-FR-220